

NV series

Induction VAV air volume control terminals

BARCOL-AIR

Induction VAV air volume control terminals

Table of contents

Description	Page
Type designation	1
Technical data	
- General	2
- Specification	3
- Installation instruction	3
Model overview / dimensions	4 - 5
Sound data NVOA	6 - 7
Sound data NVOC	8 - 9
Sound data NVOG	10 - 11
Sound data NVOJ	12 - 13

Induction VAV air volume control terminals

Type designation
NV.....

Composition type designation:

N - V - O - N - F - O - B - A

N Position 1: **Product group**

N = air volume control terminals

V Position 2: **Function**

O = not applicable
V = VAV Induction terminal
W = VAV Induction terminal with controlled induction
1 = non standard, specify separately

O Position 3: **Controls (manufacturer)**

O = without controls
For controls, contact our sales staff

N Position 4: **Outlet**

O = not applicable
A = rectangular outlet
C = 4 circular outlets ('Octopus')
G = rectangular outlet and provision for integral hot water reheat coil
J = 4 circular outlets and provision for integral hot water reheat coil
N = rectangular outlet and provision for integral electric reheat coil
Q = 4 circular outlets and provision for integral electric reheat coil
1 = non standard, specify separately

F Position 5: **Reheat coil**

O = without reheat coil
A = 1-row hot water reheat
B = 2-row hot water reheat
D = 4-row hot water reheat
E = 1-stage 230VAC/1-phase electric reheat coil
F = 2-stage 230VAC/1-phase electric reheat coil
G = 3-stage 230VAC/1-phase electric reheat coil
H = 1-stage 400VAC/3-phase electric reheat coil
J = 2-stage 400VAC/3-phase electric reheat coil
1 = non standard, specify separately

O Position 6: **Controls (type & function)**

O = without controls
For controls, contact our sales staff

B Position 7: **Sensor**

O = not applicable
B = Factory installed Flow Sensor
1 = non standard, specify separately

A Position 8: **Design Series**

Ordering example:

N	V	O	N	F	O	B	A	1	6	0	R	0	5	0	0
See above								Model				Heater capacity			

Induction VAV air volume control terminals

Technical data
Type (NV.....)



NVOA

Application

The NV rectangular pressure-independent VAV air volume control terminals are designed particularly for systems with high variations in heat load. The terminals induce room air and mix it with conditioned primary air, maintaining a nearly constant air volume to the room thus providing sufficient air movement necessary to maintain occupant comfort even in extreme load variations. This specific characteristic means that cold air 'dumping' will not occur and that extremely low primary air temperatures can be used, without producing excessive differences between the supply and the room air temperature. The Induction VAV terminals can be used for supply air applications in new or refurbishment projects. The terminals can optionally be supplied with a distribution plenum and a built-in hot water or electric reheat coil.

Features:

- Pressure independent control functions.
- Volume control range 100% to 10% without requirement for special VAV diffusers or assisting fans.
- Suitable for low temperature primary air systems.
- Optional air distribution plenum.
- Optional factory fitted hot water or electric reheat coils.
- Large size induction damper with leakage seals.
- Low noise generation.
- Suitable for VAV, CAV or shutoff operation.

- Accurate airflow sensing with 2 x 12 points averaging and better than 2.5% accuracy.
- Maintenance free.

Technical information

Casing:

Air-tight construction made of galvanized sheet steel with low casing leakage rate.

Insulation:

Internally lined with thermal and acoustic insulation with optional double skin construction.

Damper:

Damper blade made of heavy gauge galvanized steel with felt or optional neoprene gaskets.

Air Sensor:

Extruded aluminium construction with nylon connectors.

Distribution plenum:

Made of galvanized sheet steel with internal isolation. Plenum with standard rectangular or multiple (4 x circular) outlet construction. Optional 1, 2, 3 or 6 circular outlets are possible. Outlet spigots are made of galvanized steel and optionally can be provided with volume control dampers.

Reheat coil:

Choice of 1, 2 or 4-row hot water reheat coil or electric reheat coil (220-240VAC/1-phase or 380-415VAC/3-phase).

Controls:

Suitable for use with pneumatic, analogue electronic or DDC controllers. Controls can be factory fitted, wired and calibrated. A controls enclosure made from galvanised sheet steel can be provided as an option.


Delivery format:

Delivery format:

- The VAV or CAV terminal will be supplied as a single mounting assembly. Optional ordered distribution plenum, reheat coil and/or controls are factory fitted, wired and calibrated. The terminal can be directly installed and commissioned when delivered to site.
- Controls location and hot water or electric connections are as standard fitted on the right hand side of the terminal when looking in the direction of the airflow. On request, the terminal can be delivered with connections on the left hand side.
- When terminals are ordered with controls, these will be factory fitted, wired and calibrated upon request.

Induction VAV air volume control terminals

Technical data
Type (NV.....)

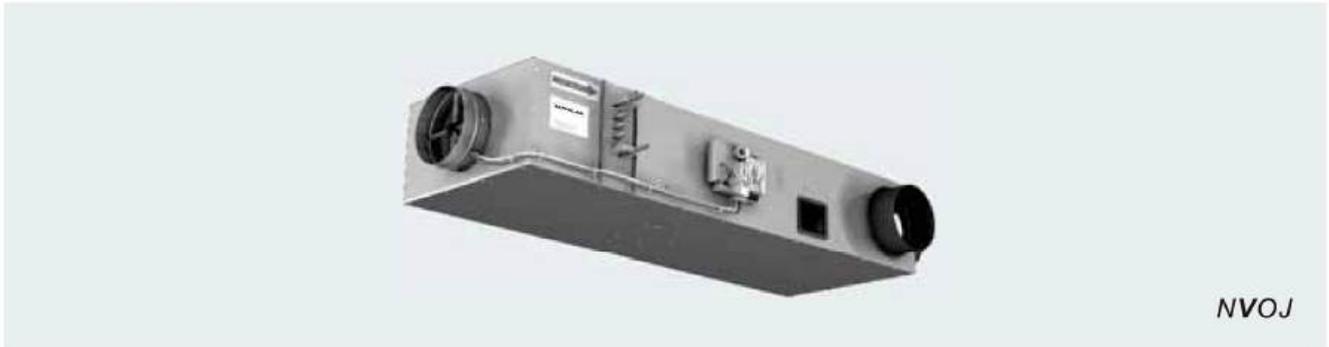

NVOJ

Specify as:

Example:

Supply and install, induction variable air volume terminals with distribution plenum with 4 circular outlets, constructed from galvanized sheet steel. The VAV terminals shall have a special low leakage damper blade and an aluminium damper shaft with self lubricating nylon bearings.

A centre averaging airflow sensor with at least 2 x 12 test points shall control the airflow with an accuracy not less than 2.5%.

The terminals shall be supplied with 1 row hot water reheat coil.

The controller shall be I/A Series, DDC controller:
LonMark compatible, type MNL-V2RVx
or
BACnet compatible, type MNB-V2.

Controls shall be factory fitted, wired and calibrated according to the following requirements:

Maximum air volume 250 l/s
Minimum air volume 60 l/s
Minimum air volume 120 l/s (in case of reheat)

Ordering example: type - model - handing = NVOJAOBA - 200R

Manufacturer: Barcol-Air

Installation Instructions :


The VAV terminals shall be installed using at least two support brackets, with anti-vibration rubber under the terminal. Each of these brackets shall be fixed with two threaded rods to the ceiling slab above.

The installation method :

1. Shall prevent the body of the VAV terminal from mechanical tension, which could damage the construction and performance of the terminal.
2. Shall prevent torsion on the induction VAV terminals, which could cause malfunction of the damper blades.
3. Provides some flexibility to the final location of the VAV terminals.
4. Use at least one diameter straight duct length before the VAV inlet.


5. Additional manual volume control dampers (VCD' s) should not be used before the unit inlet.
6. All connections shall be thermally isolated.
7. Pressure sensing tubes connected to the airflow sensor shall not be "kinked" or otherwise obstructed by the external duct insulation.

See drawing below.


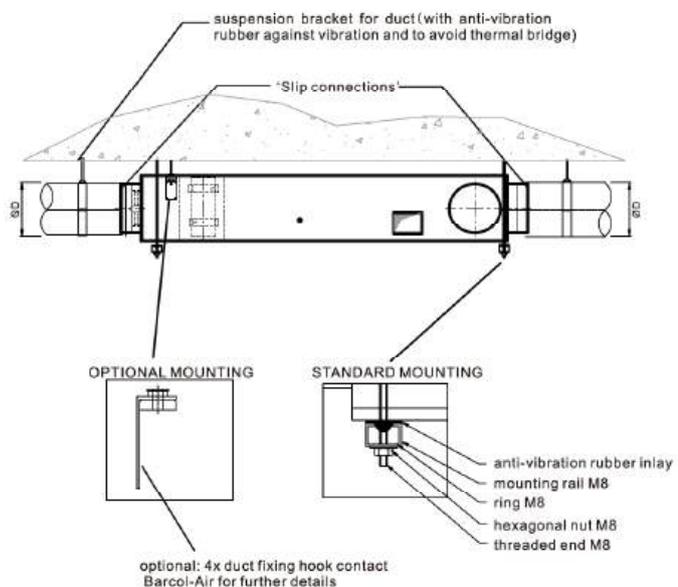


Induction VAV air volume control terminals

Model overview
Type (NV.....)

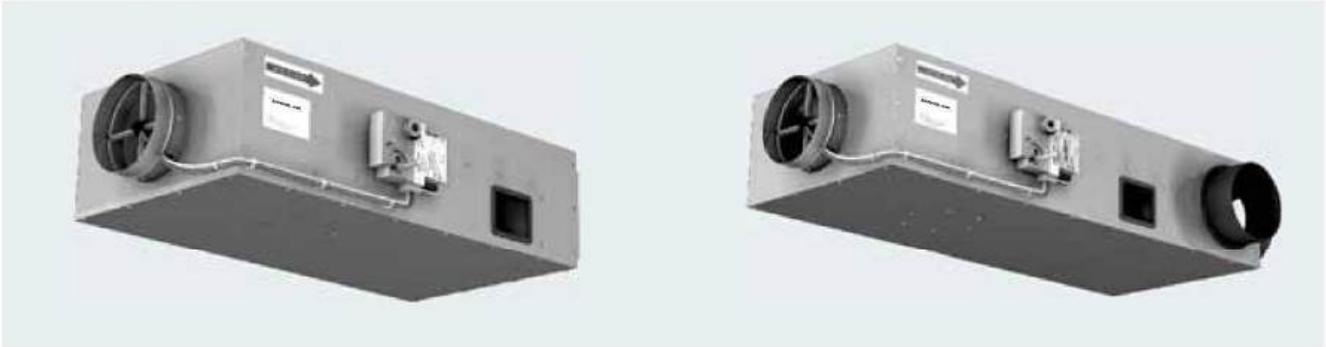

NV Series Basic Units

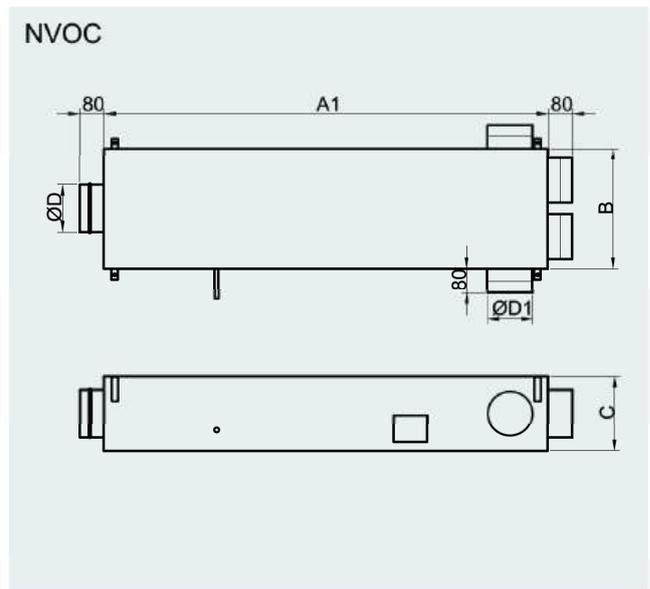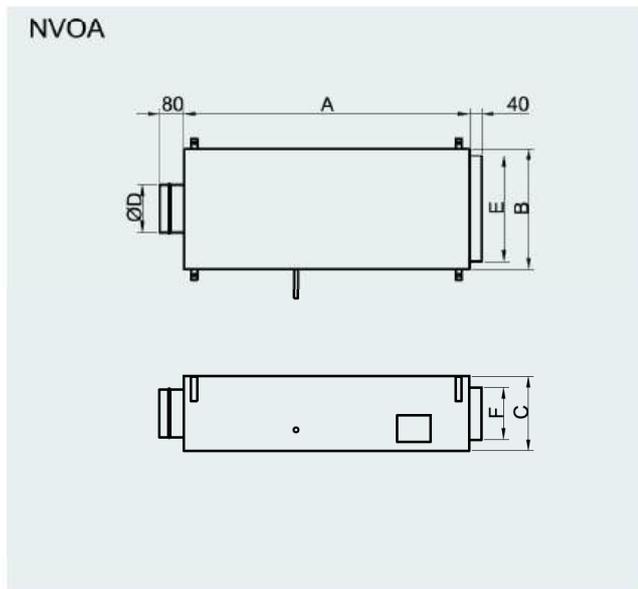

Dimensions NV


Model	100	125	160	200	250	315	355	400
A	940	940	940	940	940	1490	1490	1490
A1	1210	1210	1210	1210	1310	—	—	—
A2	1190	1190	1190	1190	1190	1740	1740	1740
A3	1460	1460	1460	1460	1660	—	—	—
B	330	330	400	500	600	740	820	910
C	228	228	248	268	318	408	408	458
ØD	98	123	158	198	248	313	353	398
ØD1	148	148	148	198	248	248	248	248
E	275	275	350	450	550	690	770	850
F	170	170	175	200	250	330	330	380

All dimensions in mm.
* = Installed length.
** = Size varies with a 1- 2-row or 4-row hot water reheat coil.



Other dimensions are available upon request.
Size 250 is maximum size for terminals with multiple outlet section.

Induction VAV air volume control terminals



Model overview
Type (NV.....)

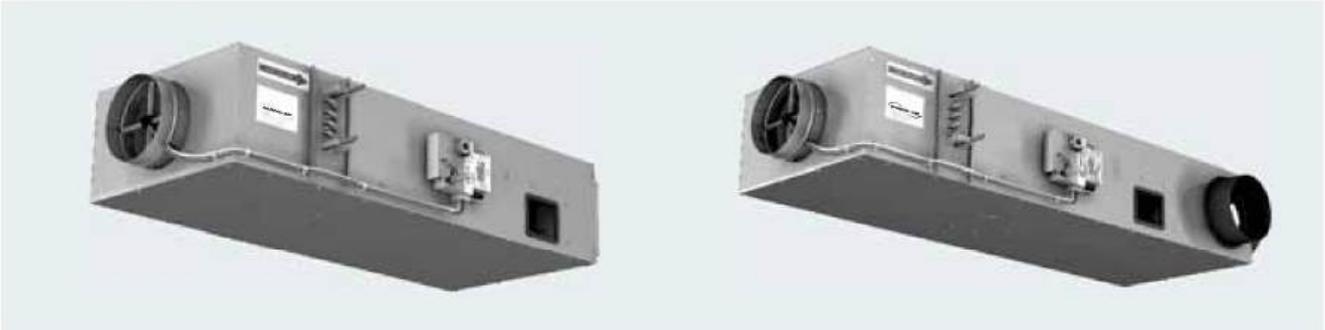

NV Series With Hot Water Reheat

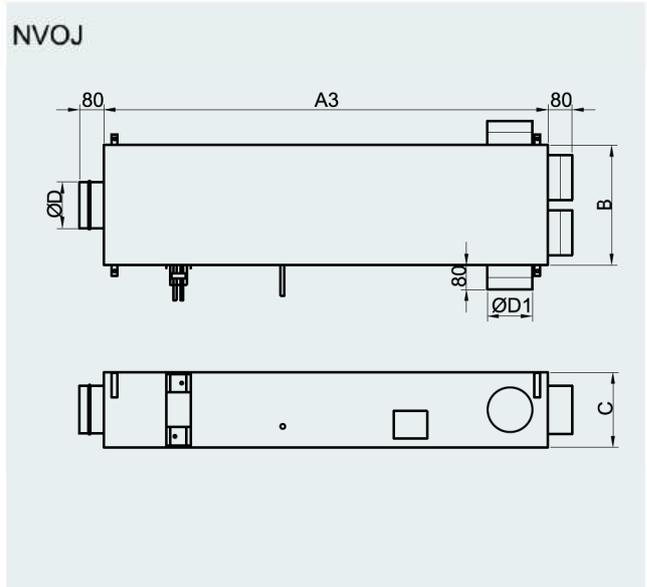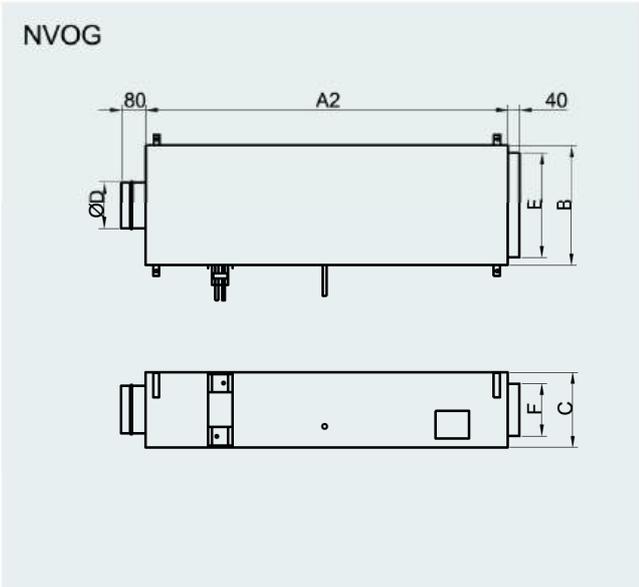


NV Series With Electric Reheat

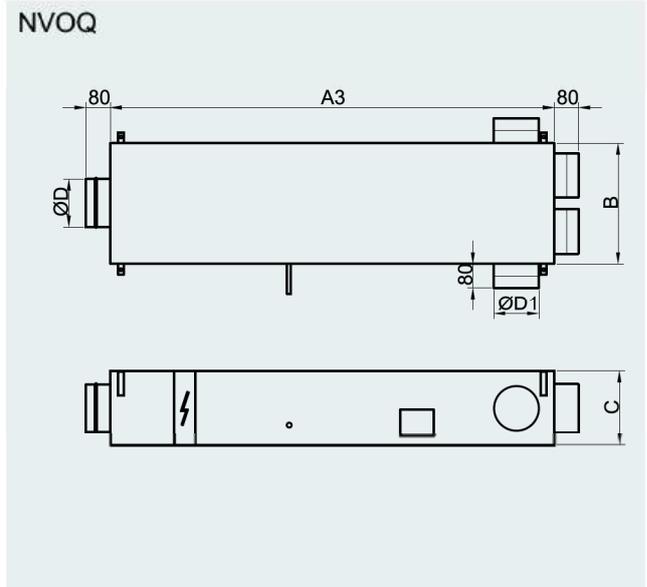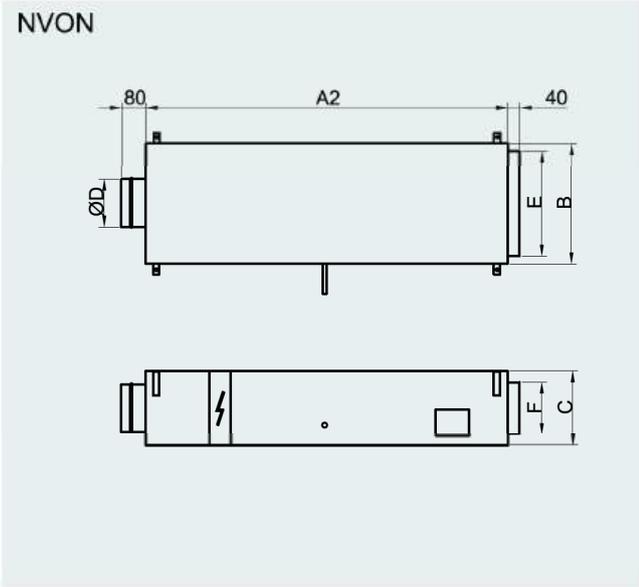

For dimensions see page 4

Induction VAV air volume control terminals

Type (NVOA)



Sound data $\Delta p = 250 \text{ Pa}$

Model	data referring to inlet spigot				$\Delta p = 250 \text{ Pa}$																			
					discharge sound									radiated sound										
	air volume				L_w in dB/Oct. (re 1pW)						Lp values			L_w in dB/Oct. (re 1pW)						Lp values				
					125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	dB (A)	NC	NR	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	dB (A)	NC	NR		
m/s	l/s	CFM	m ³ /h	dB									dB											
100	2	15	31	53	18	28	25	20	20	-	--	--	--	28	29	20	18	-	-	--	--	--		
	4	29	62	106	28	36	33	28	27	20	--	--	--	34	35	26	24	20	-	--	--	--		
	6	44	94	160	33	41	38	33	32	24	--	--	--	37	38	31	29	24	-	--	--	--		
	8	59	125	213	38	44	41	36	35	27	--	--	--	40	41	34	32	27	20	--	--	--		
	10	74	156	266	41	46	44	39	37	29	--	--	--	42	43	36	35	30	23	22	--	--		
125	2	23	49	84	24	32	29	24	24	-	--	--	--	31	32	23	20	-	-	--	--	--		
	4	47	99	168	34	40	37	32	31	23	--	--	--	37	38	29	26	22	-	--	--	--		
	6	70	149	253	39	44	41	37	35	27	--	--	--	40	41	33	31	26	19	--	--	--		
	8	94	198	337	43	48	45	40	38	30	20	--	--	43	44	37	34	29	22	22	--	--		
	10	117	248	421	46	50	47	43	40	32	23	--	--	45	46	39	37	32	25	24	--	21		
160	2	39	82	139	32	36	32	28	27	20	--	--	--	34	30	26	22	18	-	--	--	--		
	4	78	164	279	41	44	40	36	34	27	--	--	--	40	36	33	29	25	17	--	--	--		
	6	116	246	418	46	49	45	41	38	31	22	--	--	43	39	37	33	29	21	20	--	--		
	8	155	328	558	50	52	48	44	41	34	25	--	22	46	42	40	36	32	24	23	--	--		
	10	194	410	697	52	55	51	47	45	36	28	22	25	48	44	43	39	34	27	25	--	--		
200	2	61	129	219	36	39	33	30	28	20	--	--	--	43	38	32	24	20	-	--	--	--		
	4	122	258	439	44	47	41	38	35	27	--	--	--	49	44	38	31	26	19	24	--	--		
	6	183	387	658	49	52	46	42	39	31	25	--	22	52	47	43	35	30	23	28	--	22		
	8	244	516	878	53	55	49	46	42	34	28	23	25	55	50	46	38	34	26	30	22	25		
	10	305	645	1097	55	58	51	48	44	36	31	26	28	57	52	48	41	36	29	33	25	27		
250	2	96	203	345	41	42	35	31	29	20	--	--	--	46	41	35	26	22	-	21	--	--		
	4	192	406	690	48	50	43	39	36	27	23	--	--	52	47	41	33	28	21	27	--	21		
	6	288	609	1035	52	55	48	44	41	31	28	22	25	55	50	45	37	32	25	31	23	25		
	8	383	812	1380	56	58	51	47	43	34	31	26	28	58	53	49	40	36	28	33	26	28		
	10	479	1015	1725	58	61	54	50	46	37	33	29	31	60	55	51	43	38	31	36	29	30		
315	2	153	324	550	46	46	38	33	31	21	--	--	--	49	44	38	28	24	-	24	--	--		
	4	306	648	1101	52	54	46	41	38	28	27	21	23	55	50	44	35	30	23	30	22	24		
	6	459	971	1651	53	58	51	46	42	32	31	26	28	58	53	48	39	34	27	33	26	28		
	8	612	1295	2202	58	62	54	49	45	35	34	30	32	61	56	52	42	38	30	36	30	31		
	10	764	1619	2752	61	64	56	52	47	37	37	33	35	63	58	54	45	40	33	39	32	33		
355	2	195	412	701	48	48	39	34	31	21	21	--	--	51	46	39	29	25	18	26	--	20		
	4	389	824	1401	54	56	47	42	38	28	28	23	25	56	51	46	36	32	24	31	24	26		
	6	584	1236	2102	58	60	52	47	43	32	33	28	31	60	55	50	40	36	28	35	28	30		
	8	779	1649	2803	60	64	55	50	45	35	36	32	34	62	57	53	43	39	31	38	31	33		
	10	973	2061	3503	62	66	58	53	48	37	38	35	37	65	60	56	46	41	34	40	34	35		
400	2	248	524	891	51	50	41	35	32	21	24	--	--	52	47	41	30	26	19	27	--	22		
	4	495	1049	1783	56	58	49	43	39	28	30	25	28	58	53	47	37	33	25	33	26	28		
	6	743	1573	2674	59	62	54	48	43	32	35	31	33	61	56	51	41	37	29	37	30	31		
	8	990	2097	3565	61	66	57	51	46	35	38	35	36	64	59	55	44	40	32	39	33	34		
	10	1238	2621	4456	63	68	60	54	48	38	40	38	39	66	61	57	47	42	35	42	36	37		

1. Sound data is determined in a reverberation room at an independent sound laboratory, according to ISO3741 and ISO 5135 standards.
2. L_w in dB/Oct. (re 1pW) are sound power levels for discharge sound and case radiated sound. Figures less than 17 dB are indicated by "-".
3. The discharge sound pressure levels are determined with the assumptions as mentioned in table 1 for downstream ductwork including a diffuser with insulated plenum box.
4. The radiated sound pressure levels are determined with the assumptions as mentioned in table 1 for ceiling plenum and suspended ceiling absorption.
5. Lp values are including a room absorption of 10 dB/Oct.

6. DB(A), NC and NR index figures are sound pressure levels. Figures less than 20 are indicated by "-".
7. Δp_s is static pressure drop across VAV air volume control terminal with damper fully open.
8. For non standard applications and/or selections, please contact our technical staff.
9. For non standard applications and/or selections, please contact our technical staff.

Table 1: Assumptions for additional attenuation


Hz	125	250	500	1K	2K	4K
Discharge (dB)	5	10	20	30	30	25
Radiated (dB)	2	5	10	15	15	20

Table 2: Insertion Loss

Model	125	250	500	1K	2K	4K	Hz
100	7	11	16	22	23	22	dB
125	5	10	14	21	22	20	dB
160	4	7	11	15	16	15	dB
200	4	6	9	13	14	13	dB
250	3	6	8	12	13	12	dB
315	3	5	8	11	12	12	dB
355	3	4	7	10	11	12	dB
400	3	4	6	10	11	12	dB

Induction VAV air volume control terminals

Type NVOG. NVON.



Sound data $\Delta p = 150 \text{ Pa}$

Model	data referring to inlet spigot				$\Delta p = 150 \text{ Pa}$																															
					discharge sound									radiated sound																						
	velocity		air volume		L_w in dB/Oct. (re 1pW)						Lp values			L_w in dB/Oct. (re 1pW)						Lp values																
					125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	dB(A)	NC	NR	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	dB(A)	NC	NR														
m/s	l/s	CFM	m³/h	dB									dB																							
100	2	15	31	53	-	25	21	-	-	-	-	-	-	-	-	25	26	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	4	29	62	106	25	33	29	24	23	-	-	-	-	-	-	30	31	22	20	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	6	44	94	160	31	37	34	29	27	18	-	-	-	-	-	34	35	26	24	20	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	8	59	125	213	35	41	37	32	30	21	-	-	-	-	-	37	38	30	28	24	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	10	74	156	266	38	43	40	35	32	23	-	-	-	-	-	39	40	33	31	27	19	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
125	2	23	49	84	21	29	24	20	19	-	-	-	-	-	-	27	28	18	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	4	47	99	168	31	37	32	28	26	17	-	-	-	-	-	33	34	25	22	18	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	6	70	149	253	37	41	37	33	30	21	-	-	-	-	-	37	38	29	26	22	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	8	94	198	337	41	45	40	36	33	24	-	-	-	-	-	40	41	33	30	26	18	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	10	117	248	421	44	47	43	39	35	26	-	-	-	-	-	42	43	36	33	29	21	21	-	-	-	-	-	-	-	-	-	-	-	-	-	
160	2	39	82	139	29	33	28	24	22	-	-	-	-	-	-	31	27	21	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	4	78	164	279	38	41	36	32	29	21	-	-	-	-	-	36	32	28	24	20	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	6	116	246	418	43	46	41	37	33	25	-	-	-	-	-	40	36	32	29	24	17	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	8	155	328	558	47	49	44	40	36	28	22	-	-	-	-	43	39	36	32	28	20	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	10	194	410	697	50	52	47	43	39	30	25	-	-	-	-	45	41	39	35	31	23	22	-	-	-	-	-	-	-	-	-	-	-	-	-	
200	2	61	129	219	33	36	29	25	23	-	-	-	-	-	-	40	35	27	19	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	4	122	258	439	42	44	37	33	31	21	-	-	-	-	-	45	40	34	26	22	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	6	183	387	658	46	49	41	38	35	25	21	-	-	-	-	49	44	38	31	26	19	24	-	-	-	-	-	-	-	-	-	-	-	-	-	
	8	244	516	878	50	52	45	41	38	28	25	-	-	-	-	52	47	42	34	30	22	27	-	-	-	-	-	-	-	-	-	-	-	-	-	
	10	305	645	1097	53	55	47	44	40	30	27	22	-	-	-	54	49	45	37	33	25	30	21	24	-	-	-	-	-	-	-	-	-	-	-	
250	2	96	203	345	38	39	31	27	25	-	-	-	-	-	-	42	37	30	21	18	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	4	192	406	690	45	47	39	35	32	21	-	-	-	-	-	48	43	37	28	24	-	23	-	-	-	-	-	-	-	-	-	-	-	-	-	
	6	288	609	1035	50	52	44	40	36	25	24	-	-	-	-	52	47	41	32	28	21	27	-	-	-	-	-	-	-	-	-	-	-	-	-	
	8	383	812	1380	53	55	47	43	39	28	28	22	-	-	-	55	50	45	36	32	24	30	22	24	-	-	-	-	-	-	-	-	-	-	-	
	10	479	1015	1725	55	58	50	46	41	30	30	25	21	-	-	57	52	48	39	35	27	33	25	27	-	-	-	-	-	-	-	-	-	-	-	
315	2	153	324	550	43	43	34	29	26	-	-	-	-	-	-	45	40	33	23	20	-	20	-	-	-	-	-	-	-	-	-	-	-	-	-	
	4	306	648	1101	49	51	42	37	33	22	23	21	-	-	-	51	46	40	30	26	19	26	-	-	-	-	-	-	-	-	-	-	-	-	-	
	6	459	971	1651	53	55	46	42	37	26	28	26	22	-	-	55	50	44	35	30	23	30	22	24	-	-	-	-	-	-	-	-	-	-	-	
	8	612	1295	2202	56	59	50	45	40	29	31	30	26	28	-	-	58	53	48	38	34	26	33	25	27	-	-	-	-	-	-	-	-	-	-	
	10	764	1619	2752	58	61	52	48	42	31	33	33	29	33	29	-	-	60	55	51	41	37	29	35	29	30	-	-	-	-	-	-	-	-	-	
355	2	195	412	701	46	44	35	30	27	-	-	-	-	-	-	47	42	35	24	21	-	22	-	-	-	-	-	-	-	-	-	-	-	-	-	
	4	389	824	1401	51	52	43	38	34	22	25	23	-	-	-	53	48	41	31	27	20	28	-	-	-	-	-	-	-	-	-	-	-	-	-	
	6	584	1236	2102	55	57	48	43	38	26	30	28	25	28	-	-	56	51	46	36	31	24	31	24	26	-	-	-	-	-	-	-	-	-	-	
	8	779	1649	2803	57	60	51	46	41	29	33	32	28	32	28	-	-	59	54	49	39	35	27	34	27	29	-	-	-	-	-	-	-	-	-	
	10	973	2061	3503	59	63	54	49	43	31	35	35	31	35	31	31	-	-	62	57	52	42	38	30	37	31	32	-	-	-	-	-	-	-	-	
400	2	248	524	891	49	46	37	31	28	-	-	-	-	-	-	48	43	36	25	22	-	23	-	-	-	-	-	-	-	-	-	-	-	-	-	
	4	495	1049	1783	54	54	45	39	35	22	27	25	21	25	21	-	-	54	49	43	32	28	21	29	21	24	-	-	-	-	-	-	-	-	-	
	6	743	1573	2674	57	59	49	44	39	27	32	31	27	32	27	-	-	58	53	47	37	32	25	33	26	28	-	-	-	-	-	-	-	-	-	
	8	990	2097	3565	59	62	53	47	42	29	35	35	31	35	31	31	-	-	61	56	51	40	36	28	36	29	31	-	-	-	-	-	-	-	-	
	10	1238	2621	4456	60	65	55	49	44	32	37	38	34	38	34	34	-	-	63	58	54	43	39	31	38	32	33	-	-	-	-	-	-	-	-	

1. Sound data is determined in a reverberation room at an independent sound laboratory, according to ISO3741 and ISO 5135 standards.
2. L_w in dB/Oct. (re 1pW) are sound power levels for discharge sound and case radiated sound. Figures less than 17 dB are indicated by "-".
3. The discharge sound pressure levels are determined with the assumptions as mentioned in table 1 for downstream ductwork including a diffuser with insulated plenum box.
4. The radiated sound pressure levels are determined with the assumptions as mentioned in table 1 for ceiling plenum and suspended ceiling absorption.
5. Lp values are including a room absorption of 10 dB/Oct.

6. DB(A), NC and NR index figures are sound pressure levels. Figures less than 20 are indicated by "-".
7. Δp_s is static pressure drop across VAV air volume control terminal with damper fully open.
8. For non standard applications and/or selections, please contact our technical staff.
9. For non standard applications and/or selections, please contact our technical staff.

Table 1: Assumptions for additional attenuation


Hz	125	250	500	1K	2K	4K
Discharge (dB)	5	10	20	30	30	25
Radiated (dB)	2	5	10	15	15	20

Table 2: Insertion Loss

Model	125	250	500	1K	2K	4K	Hz
100	7	11	16	22	23	22	dB
125	5	10	14	21	22	20	dB
160	4	7	11	15	16	15	dB
200	4	6	9	13	14	13	dB
250	3	6	8	12	13	12	dB
315	3	5	8	11	12	12	dB
355	3	4	7	10	11	12	dB
400	3	4	6	10	11	12	dB

Induction VAV air volume control terminals

Type NVOG. NVON.



Sound data $\Delta p = 250 \text{ Pa}$

Model	data referring to inlet spigot				$\Delta p = 250 \text{ Pa}$																			
					discharge sound									radiated sound										
	air volume				L_w in dB/Oct. (re 1pW)						Lp values			L_w in dB/Oct. (re 1pW)						Lp values				
					125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	dB (A)	NC	NR	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	dB (A)	NC	NR		
m/s	l/s	CFM	m³/h	dB									dB											
100	2	15	31	53	18	28	25	20	20	-	--	--	--	28	29	20	18	-	-	--	--	--		
	4	29	62	106	28	36	33	28	27	20	--	--	--	34	35	26	24	20	-	--	--	--		
	6	44	94	160	33	41	38	33	32	24	--	--	--	37	38	31	29	24	-	--	--	--		
	8	59	125	213	38	44	41	36	35	27	--	--	--	40	41	34	32	27	20	--	--	--		
	10	74	156	266	41	46	44	39	37	29	--	--	--	42	43	36	35	30	23	22	--	--		
125	2	23	49	84	24	32	29	24	24	-	--	--	--	31	32	23	20	-	-	--	--	--		
	4	47	99	168	34	40	37	32	31	23	--	--	--	37	38	29	26	22	-	--	--	--		
	6	70	149	253	39	44	41	37	35	27	--	--	--	40	41	33	31	26	19	--	--	--		
	8	94	198	337	43	48	45	40	38	30	20	--	--	43	44	37	34	29	22	22	--	--		
	10	117	248	421	46	50	47	43	40	32	23	--	--	45	46	39	37	32	25	24	--	21		
160	2	39	82	139	32	36	32	28	27	20	--	--	--	34	30	26	22	18	-	--	--	--		
	4	78	164	279	41	44	40	36	34	27	--	--	--	40	36	33	29	25	17	--	--	--		
	6	116	246	418	46	49	45	41	38	31	22	--	--	43	39	37	33	29	21	22	--	--		
	8	155	328	558	50	52	48	44	41	34	25	--	22	46	42	40	36	32	24	23	--	--		
	10	194	410	697	52	55	51	47	43	36	28	22	25	48	44	43	39	34	27	25	--	--		
200	2	61	129	219	36	39	33	30	28	20	--	--	--	43	38	32	24	20	-	--	--	--		
	4	122	258	439	44	47	41	38	35	27	--	--	--	49	44	38	31	26	19	24	--	--		
	6	183	387	658	49	52	46	42	39	31	25	--	22	52	47	43	35	30	23	28	--	22		
	8	244	516	878	53	55	49	46	42	34	28	23	25	55	50	46	38	34	26	30	22	25		
	10	305	645	1097	55	58	51	48	44	36	31	26	28	57	52	48	41	36	29	33	25	27		
250	2	96	203	345	41	42	35	31	29	20	--	--	--	46	41	35	26	22	-	21	--	--		
	4	192	406	690	48	50	43	39	36	27	23	--	--	52	47	41	33	28	21	27	--	21		
	6	288	609	1035	52	55	48	44	41	31	28	22	25	55	50	45	37	32	25	31	23	25		
	8	383	812	1380	56	58	51	47	43	34	31	26	28	58	53	49	40	36	28	33	26	28		
	10	479	1015	1725	58	61	54	50	46	37	33	29	31	60	55	51	43	38	31	36	29	30		
315	2	153	324	550	46	46	38	33	31	21	--	--	--	49	44	38	28	24	-	24	--	--		
	4	306	648	1101	52	54	46	41	38	28	27	21	23	55	50	44	35	30	23	30	22	24		
	6	459	971	1651	56	58	51	46	42	32	31	26	28	58	53	48	39	34	27	33	26	28		
	8	612	1295	2202	58	62	54	49	45	35	34	30	32	61	56	52	42	38	30	36	30	31		
	10	764	1619	2752	61	64	56	52	47	37	37	33	35	63	58	54	45	40	33	39	32	33		
355	2	195	412	701	48	48	39	34	31	21	21	--	--	51	46	39	29	25	18	26	--	20		
	4	389	824	1401	54	56	47	42	38	28	28	23	25	56	51	46	36	32	24	31	24	26		
	6	584	1236	2102	58	60	52	47	43	32	33	28	31	60	55	50	40	36	28	35	28	30		
	8	779	1649	2803	60	64	55	50	45	35	36	32	34	62	57	53	43	39	31	38	31	33		
	10	973	2061	3503	62	66	58	53	48	37	38	35	37	65	60	56	46	41	34	40	34	35		
400	2	248	524	891	51	50	41	35	32	21	24	--	--	52	47	41	30	26	19	27	-	22		
	4	495	1049	1783	56	58	49	43	39	28	30	25	28	58	53	47	37	33	25	33	26	28		
	6	743	1573	2674	59	62	54	48	43	32	35	31	33	61	56	51	41	37	29	37	30	31		
	8	990	2097	3565	61	66	57	51	46	35	38	35	36	64	59	55	44	40	32	39	33	34		
	10	1238	2621	4456	63	68	60	54	48	38	40	38	39	66	61	57	47	42	35	42	36	37		

1. Sound data is determined in a reverberation room at an independent sound laboratory, according to ISO3741 and ISO 5135 standards.
2. L_w in dB/Oct. (re 1pW) are sound power levels for discharge sound and case radiated sound. Figures less than 17 dB are indicated by "-".
3. The discharge sound pressure levels are determined with the assumptions as mentioned in table 1 for downstream ductwork including a diffuser with insulated plenum box.
4. The radiated sound pressure levels are determined with the assumptions as mentioned in table 1 for ceiling plenum and suspended ceiling absorption.
5. L_p values are including a room absorption of 10 dB/Oct.

6. DB(A), NC and NR index figures are sound pressure levels. Figures less than 20 are indicated by "--".
7. Δp_s is static pressure drop across VAV air volume control terminal with damper fully open.
8. For non standard applications and/or selections, please contact our technical staff.
9. For non standard applications and/or selections, please contact our technical staff.

Table 1: Assumptions for additional attenuation

Hz	125	250	500	1K	2K	4K
Discharge (dB)	5	10	20	30	30	25
Radiated (dB)	2	5	10	15	15	20

Table 2: Insertion Loss

Model	125	250	500	1K	2K	4K	Hz
100	7	11	16	22	23	22	dB
125	5	10	14	21	22	20	dB
160	4	7	11	15	16	15	dB
200	4	6	9	13	14	13	dB
250	3	6	8	12	13	12	dB
315	3	5	8	11	12	12	dB
355	3	4	7	10	11	12	dB
400	3	4	6	10	11	12	dB

Induction VAV air volume control terminals

Type NVOJ. NVOQ.

Sound data $\Delta p = 250$ Pa



Model	data referring to inlet spigot				$\Delta p = 250$ Pa																	
					discharge sound						radiated sound											
	air volume				L_w in dB/Oct. (re 1pW)						Lp values			L_w in dB/Oct. (re 1pW)						Lp values		
					125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	dB(A)	NC	NR	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	dB(A)	NC	NR
m/s	l/s	CFM	m ³ /h	dB						dB												
100	2	15	31	53	-	21	17	-	-	-	--	--	--	28	29	20	18	-	-	--	--	--
	4	29	62	106	22	29	25	18	-	-	--	--	--	34	35	26	24	20	-	--	--	--
	6	44	94	160	27	34	30	23	20	-	--	--	--	37	38	31	29	24	-	--	--	--
	8	59	125	213	32	37	33	26	23	-	--	--	--	40	41	34	32	27	20	--	--	--
	10	74	156	266	35	39	36	29	25	-	--	--	--	42	43	36	35	30	23	22	--	--
125	2	23	49	84	18	25	21	-	-	-	--	--	--	31	32	23	20	-	-	--	--	--
	4	47	99	168	28	33	29	22	19	-	--	--	--	37	38	29	26	22	-	--	--	--
	6	70	149	253	33	37	33	27	23	-	--	--	--	40	41	33	31	26	19	--	--	--
	8	94	198	337	37	41	37	30	26	18	--	--	--	43	44	37	34	29	22	22	--	--
	10	117	248	421	40	43	39	33	28	20	--	--	--	45	46	39	37	32	25	24	--	21
160	2	39	82	139	26	29	24	18	-	-	--	--	--	34	30	26	22	18	-	--	--	--
	4	78	164	279	35	37	32	26	22	-	--	--	--	40	36	33	29	25	17	--	--	--
	6	116	246	418	40	42	37	31	26	19	--	--	--	43	39	37	33	29	21	20	--	--
	8	155	328	558	44	45	40	34	29	22	--	--	--	46	42	40	36	32	24	23	--	--
	10	194	410	697	46	48	43	37	31	24	21	--	--	48	44	43	39	34	27	25	--	--
200	2	61	129	219	30	32	25	20	-	-	--	--	--	43	38	32	24	20	-	--	--	--
	4	122	258	439	38	40	33	28	23	-	--	--	--	49	44	38	31	26	19	24	--	--
	6	183	387	658	43	45	38	32	27	19	--	--	--	52	47	43	35	30	23	28	--	22
	8	244	516	878	47	48	41	36	30	22	21	--	--	55	50	46	38	34	26	30	22	25
	10	305	645	1097	49	51	43	38	32	24	24	--	20	57	52	48	41	36	29	33	25	27
250	2	96	203	345	35	35	27	21	17	-	--	--	--	46	41	35	26	22	-	21	--	--
	4	192	406	690	42	43	35	29	24	-	--	--	--	52	47	41	33	28	21	27	--	21
	6	288	609	1035	46	48	40	34	29	19	21	--	--	55	50	45	37	32	25	31	23	25
	8	383	812	1380	50	51	43	37	31	22	24	--	21	58	53	49	40	36	28	33	26	28
	10	479	1015	1725	52	54	46	40	34	25	27	21	24	60	55	51	43	38	31	36	29	30
315	2	153	324	550	40	39	30	23	19	-	--	--	--	49	44	38	28	24	-	24	--	--
	4	306	648	1101	46	47	38	31	26	-	--	--	--	55	50	44	35	30	23	30	22	24
	6	459	971	1651	50	51	43	36	30	20	24	--	21	58	53	48	39	34	27	33	26	28
	8	612	1295	2202	52	55	46	39	33	23	27	22	24	61	56	52	42	38	30	36	30	31
	10	764	1619	2752	55	57	48	42	35	25	30	25	27	63	58	54	45	40	33	39	32	33
355	2	195	412	701	42	41	31	24	19	-	--	--	--	51	46	39	29	25	18	26	--	20
	4	389	824	1401	48	49	39	32	26	-	22	--	--	56	51	46	36	32	24	31	24	26
	6	584	1236	2102	52	53	44	37	31	20	26	20	23	60	55	50	40	36	28	35	28	30
	8	779	1649	2803	54	57	47	40	33	23	29	24	27	62	57	53	43	39	31	38	31	33
	10	973	2061	3503	56	59	50	43	36	25	31	27	29	65	60	56	46	41	34	40	34	35
400	2	248	524	891	45	43	33	25	20	-	--	--	--	52	47	41	30	26	19	27	--	22
	4	495	1049	1783	50	51	41	33	27	-	24	--	20	58	53	47	37	33	25	33	26	28
	6	743	1573	2674	53	55	46	38	31	20	28	22	25	61	56	51	41	37	29	37	30	31
	8	990	2097	3565	55	59	49	41	34	23	31	26	29	64	59	55	44	40	32	39	33	34
	10	1238	2621	4456	57	61	52	44	36	26	33	31	31	66	61	57	47	42	35	42	36	47

- Sound data is determined in a reverberation room at an independent sound laboratory, according to ISO3741 and ISO 5135 standards.
- L_w in dB/Oct. (re 1pW) are sound power levels for discharge sound and case radiated sound. Figures less than 17 dB are indicated by "-".
- The discharge sound pressure levels are determined with the assumptions as mentioned in table 1 for downstream ductwork including a diffuser with insulated plenum box.
- The radiated sound pressure levels are determined with the assumptions as mentioned in table 1 for ceiling plenum and suspended ceiling absorption.
- Lp values are including a room absorption of 10 dB/Oct.

- DB(A), NC and NR index figures are sound pressure levels. Figures less than 20 are indicated by "-".
- Δp_s is static pressure drop across VAV air volume control terminal with damper fully open.
- For non standard applications and/or selections, please contact our technical staff.
- For non standard applications and/or selections, please contact our technical staff.

Table 1: Assumptions for additional attenuation

Hz	125	250	500	1K	2K	4K
Discharge (dB)	5	10	20	30	30	25
Radiated (dB)	2	5	10	15	15	20

Table 2: Insertion Loss

Model	125	250	500	1K	2K	4K	Hz
100	14	20	26	35	38	37	dB
125	12	18	24	34	37	35	dB
160	11	16	21	28	31	30	dB
200	11	15	19	26	29	28	dB
250	10	14	18	25	28	27	dB
315	10	13	18	25	27	27	dB
355	10	13	18	25	27	27	dB
400	9	12	16	23	25	26	dB

